



Automated Pure Water Product Instructions

Media / Resin Loader

READ BEFORE USING - Never Put a Vacuum (Negative Pressure) on the Pressure Vessel That you are Filling. When you are Drawing Media into the Vessel, Always Allow Air to Flow with Media, (Never Stick Inlet Tube Directly into a Bag of Media), Always Skim Media Off Top, Allowing Air to Flow with the Media.



Product Brief: The media loader has been designed to work with a Shop Vacuum with a 2-1/2" vacuum hose. No gaskets are required for the operation of your media loader. A vacuum with a 2-1/2" attachment hose is all that is required to operate loader. (Not supplied with loader.)

Use Only the Top Tank Head for 2-1/2" Threaded Tanks and Remove GrayTube



Use Both the Tank Head & Bottom Adapter for 4" Threaded Tanks with the GrayTube in Place

Operating Instructions:

- 1 - Place the media loader on the top of the tank.
- 2 - Place media fill hose in the inlet side of the loader. See diagram on back
- 3 - Place 2-1/2" vacuum hose in the outlet side of the loader. See diagram on back.
- 4 - Attach outlet hose to the vacuum side of the vacuum.
- 5 - Hold end of inlet hose in your hand.
- 6 - Switch on vacuum and begin to load media while moving the media fill hose in a back and forth motion allowing air to be drawn in with media.



IMPORTANT: See reverse side for additional information.

NELSEN

C O R P O R A T I O N

3250 Barber Road
Norton, OH 44203
Phone: 800.362.9686
Fax: 888.544.8780

NelsenCorp.com

10115 W Van Buren St #6
Tolleson, AZ 85353
Phone: 866.445.4299
Fax: 602.442.0447

NelsenCorp.com/APWProducts


4410 E Adamo Dr Suite 102
Tampa, FL 33619
Phone: 813.712.2270
Fax: 813.712.2274

Commercial.NelsenCorp.com

1012 Assembly Circle - # 100
Schertz, TX 78154
Phone: 855.674.0357
Fax: 210.714.2571

VestaWater.com

UnderSide View of 2-1/2" Vacuum Head

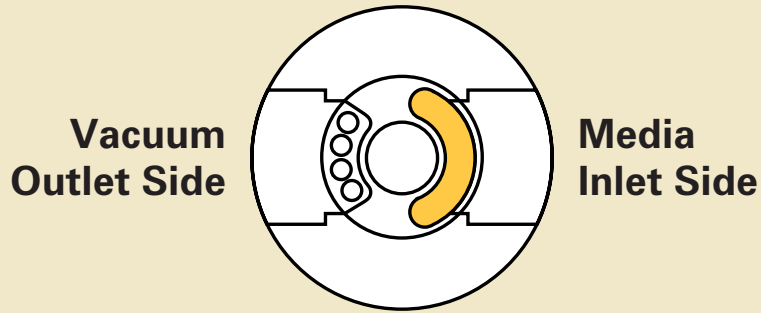

WARNING!

Media Inlet Side - Make Sure the Hose is Not Blocked at any Time During Loading/Do Not Force the end of the Hose into a Bag of Media.

Do Not Allow Unqualified Individuals to Operate or Use Media Loader. Failure to Correctly Use the Media Loader may Result in Catastrophic Tank Failure.



HELPFUL HINT

Due to the additional moisture in some resins, we recommend setting "resin bag" in upright position and placing very small drain holes in bottom of bag, thus allowing excess water to drain out before attempting to fill tanks.